


## MULTI-PURPOSE PENETRATING SEALER

**DO-IT-ALL** is a multi-purpose penetrating clear sealer for use over any deteriorated surface requiring restoration or as a protective coating on new surfaces. Containing pure hybrid 100% acrylic, **DO-IT-ALL** is shipped in a concentrated form and is diluted prior to use with conventional tap water.

When fully diluted, 5 Litre of **DO-IT-ALL** will cover up to 150 m<sup>2</sup>/coat depending on surface absorbency and surface profile. The product also contains a high amount of fungicide and will help prevent the growth of Algae mould and fungus on interior and exterior surfaces.

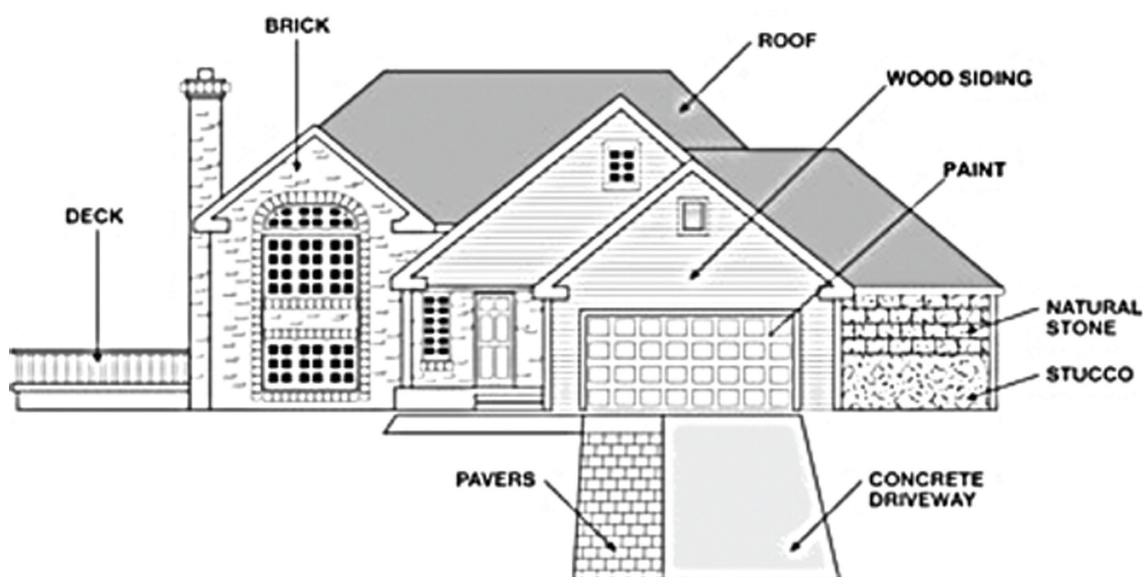

**DO-IT-ALL** can be used on:

- Clay roof tiles
- Paint
- Wood
- Metal
- Cement Blocks
- Concrete
- Brick
- Stucco
- Concrete Pavers
- Painted walls
- Primer for hard/glossy surfaces
- Mist coat for plaster and
- Mist coat for plasterboard
- Concrete roof tiles
- Shingles

**DO-IT-ALL** will dry in approximately 30 minutes to 1 hour under normal conditions and may be re-coated after 2 hours. Two applications recommended.

Made for and distributed in the UK by: Abacus Construction Products Ltd  
23 Long Beach Drive, Eastbourne, East Sussex BN23 5NA, Tel: 0800 0833 289  
Sales@abacusconstructionproducts.co.uk  
www.abacusconstructionproducts.co.uk  
www.waterproofinguk.com



## MULTI-PURPOSE PENETRATING SEALER

**DO-IT-ALL** is for use over any deteriorated surface requiring restoration or as a protective coating on new surfaces. Containing hybrid acrylic, **DO-IT-ALL** is shipped in a concentrated form and is diluted prior to use with conventional tap water. A 5 Litre container of **DO-IT-ALL** will cover up to 150 m<sup>2</sup> depending on dilution. The product also contains a high amount of fungicide and will help prevent the growth of mould and fungus on interior and exterior surfaces.

**DO-IT-ALL** can be used on:

(DO-IT-ALL MIX RATIO: 'X' PARTS WATER: 1 PART DO-IT-ALL)

Plasterboard (3:1)  
Paint (3:1)  
Wood (3:1)  
Natural Stone (3:1)  
Concrete Blocks (4:1)  
Concrete (2:1-4:1)  
Brick (3:1)

Plaster (3:1)  
Stucco (3:1)  
Conc. Pavers (2:1)  
Conc. Pavers (4:1)  
Asph. shingles (2:1)  
Asph. shingles (3:1)  
Clay roof tiles (2:1)

Clay roof tiles (3:1)  
Conc. roof tiles (2:1)  
Conc. roof tiles (3:1)  
Leaking roofs (2:1)  
Painted walls (3:1)

**DO-IT-ALL** will dry in approximately 30 minutes to 1 hour under normal conditions and may be re-coated after 2 hours.

### Application:

**DO-IT-ALL** is concentrated, supplied in a 5 Litre container and **must be diluted** with tap water prior to use and thoroughly mixed. The surface over which the sealer is to be applied should be cleaned to remove as much deteriorated residue, flakes, or powder as possible. The diluted product is best rolled or sprayed onto the surface, but can be brushed as well. Spraying can be by garden type pump-up sprayer. Apply the diluted product evenly over the surface to thoroughly wet the area. Ideal application temperature is above 10°C to facilitate drying time. It is recommended that for best results, **two coats be applied**.

**Theoretical Coverage:** Up to 150 m<sup>2</sup>/ 5 Litre unit.

Precise coverage is dependent upon surface profile and porosity of the substrate, and the desired finish.

For example:

A dilution of 4:1 on concrete will when cured will be virtually undetectable.

A dilution of 2:1 on concrete will when cured result in a slightly enhanced colouring and a sheen.

A small trial prior to main application is recommended to determine desired results.

### Clean-Up:

All tools can be cleaned with a solution of soap and water. **DO-IT-ALL** is extremely fast drying so caution should be taken to have a wet rag available to remove any overspray of the product.

### Caution:

Protect the product from freezing. Do not take internally and avoid contact with eyes and skin by wearing protective clothing and goggles. **KEEP OUT OF REACH OF CHILDREN.**

### Liability Limitations:

**DO-IT-ALL** is designed to perform as stated. However, we cannot control application conditions or any misuse of the product. It is up to the user to test the product on a small area to determine the suitability of this product for their application. Should any problems occur with the use of this product, we accept no liability beyond replacement of the product or a refund equal to the purchase price.

Made by Aquaseal Europe Ltd. [www.aquasealeurope.co.uk](http://www.aquasealeurope.co.uk)

Distributed in the UK by:

Abacus Construction Products Ltd. 26 Long Beach View, Eastbourne, East Sussex BN23 5NA.

Tel: 0800 0833 289 Email: [Sales@abacusconstructionproducts.co.uk](mailto:Sales@abacusconstructionproducts.co.uk)

Web: [www.abacusconstructionproducts.co.uk](http://www.abacusconstructionproducts.co.uk)

